QUIZALOFOP-P-ETHYL 641

QUIZALOFOP-P-ETHYL

641

ISO common name Quizalofop-P-ethyl

Chemical name Ethyl (R)-2-[4-(6-Chloroquinoxalin-2-yloxy)phenoxy]propionate

Empirical formula C₁₉H₁₇ClN₂O₄

RMM 372.8

m.p. 76.1~77.1 °C

v.p. 1.10×10^{-4} mPa at 20 °C

Solubility In water, 6.1×10⁻⁴ g/l at 20 °C, pH 5.0-7.0; Xylene, ethyl acetate and

acetone > 250g/l, 1,2-dichloroethane > 1000g/l at 22-23 °C; methanol

34.87 g/l, n-heptane 7.168 g/l at 20 $^{\circ}\text{C}$

Description Off-white powder

Stability Stable at neutral and acidity condition.

Formulation Emulsifiable concentrate

QUIZALOFOP-P-ETHYL TECHNICAL 641/TC/M/-

1. Sampling. Take at least 100 g.

2. Identity tests

- **2.1 HPLC.** Use the HPLC method below. The relative retention time of Quizalofop-P-ethyl in the sample solution should not deviate by more than 1.5% from that of calibration solution.
- **2.2 Infrared.** Prepare potassium bromide discs for the Quizalofop-P-ethyl technical sample and reference substance. Scan the discs from 4000-400 cm⁻¹. The spectrum produced from the sample should not differ significantly from that of the standard.

3. Quizalofop-P-ethyl

OUTLINE OF METHOD

The sample is dissolved in mobile phase with n-heptane and isopropanol. Quizalofop-P-ethyl is separated and determined by normal phase HPLC on Chiralcel AD-H film stainless column with UV detector at 237 nm, quantified by external standard method.

REAGENTS

n-Heptane: HPLC grade Isopropanol: HPLC grade

Quizalofop-P-ethyl reference standard of known purity: w≥ 97.0%

Preparation of calibration solution in duplicate: Weigh approximately (to the nearest 0.1 mg) 50 mg Quizalofop-P-ethyl standard into 50 ml volumetric flask. Dissolve to the mark with mobile phase and mix thoroughly (Solution C_A and C_B).

APPARATUS

High-performance liquid chromatography equipped with UV detector

Column stainless steel: 250mm X 4.6 mm (id), Chiralcel AD-H, 5 µm, or equivalent

Chromatographic work station Filter pore diameter: 0.45 µm Automatic sampler: 100 µl

Ultrasonic bath

PROCEDURES

(a) Liquid Chromatographic Conditions (typical) Mobile phase: n-heptane + isopropanol = 90 + 10 (v/v)

Flow rate: 0.6 ml/min

Detector wavelength: 237 nm Injection volume: 1.5 μl Column temperature: 25 °C

Retention time: approximately 15.4 min.

- (b) Equilibration of the chromatographic system. Inject the calibration solution and repeat the injections until retention times and the response factors calculated from the peak areas vary by less than 1% for successive injections.
- (c) Preparation of sample solution: Weigh (to the nearest 0.1 mg) sufficient sample to contain about 50 mg Quizalofop-P-ethyl into 50 ml volumetric flask. Dissolve to the mark with mobile phase and mix thoroughly. Filter through 0.45 μ m filter membrane if necessary. Prepare in duplicate (S₁ and S₂)
- (d) Determination: Inject in duplicate 1.5 μ l portions of each sample solution bracketing them by injections of the calibration solution as follows: C_A , S_1 , S_1 , C_B , S_2 , S_2 , C_A and so on. Measure the relevant peak areas.
- (e) Calculation

$$f_i = \frac{s \times P}{H_s}$$
 Content of Quizalofop-P-ethyl $= \frac{H_w \times f}{w}$ g/kg

where:

 f_i = individual response factor

f = mean response factor

 H_S = peak areas of Quizalofop-P-ethyl in the calibration solution

 H_w = peak areas of Quizalofop-P-ethyl in the sample solution

s = mass of Quizalofop-P-ethyl standard (mg)

w = mass of sample taken (mg)

P = purity of Quizalofop-P-ethyl standard (g/kg)

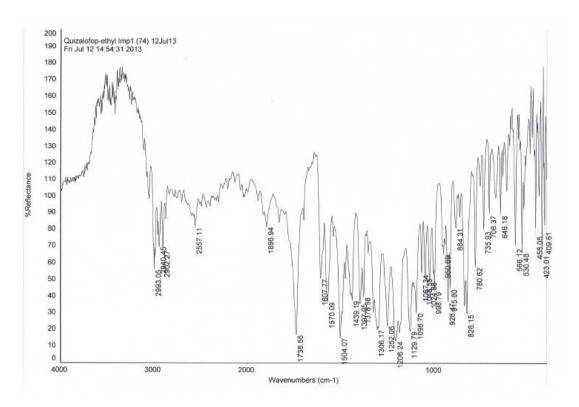


Fig. 1 Infrared spectra of Quizalofop-P-ethyl

QUIZALOFOP-P-ETHYL EMULSIFIABLE CONCENTRATE ******

- 1. Sampling. Take at least 1 l.
- 2. Identity tests. As for Quizalofop-P-ethyl technical ******
- 3. Quizalofop-P-ethyl. As for Quizalofop-P-ethyl technical *****

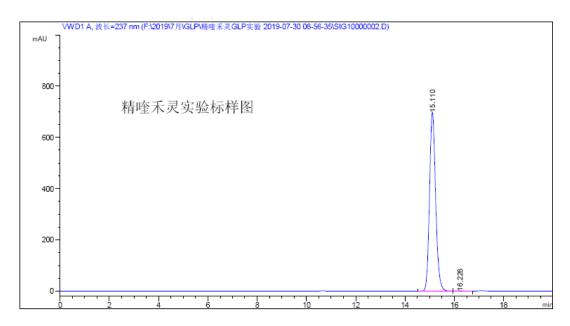


Fig. 2 Chromatogram of Quizalofop-P-ethyl standard

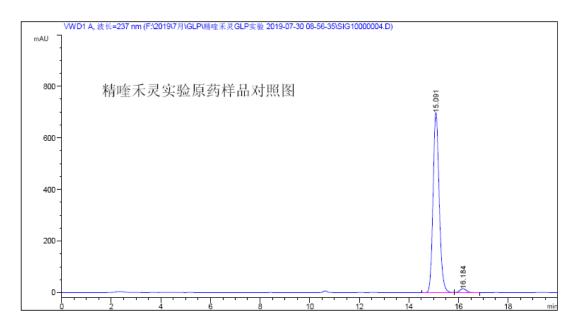


Fig. 3 Chromatogram of Quizalofop-P-ethyl TC sample

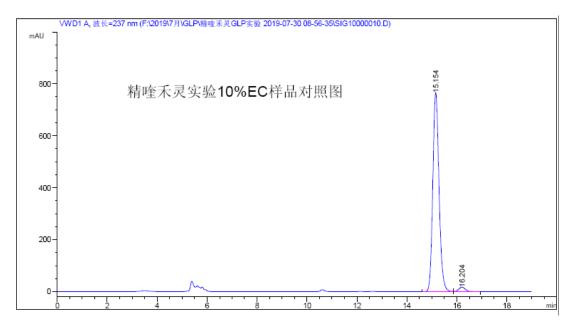


Fig. 4 Chromatogram of Quizalofop-P-ethyl 10% EC sample